
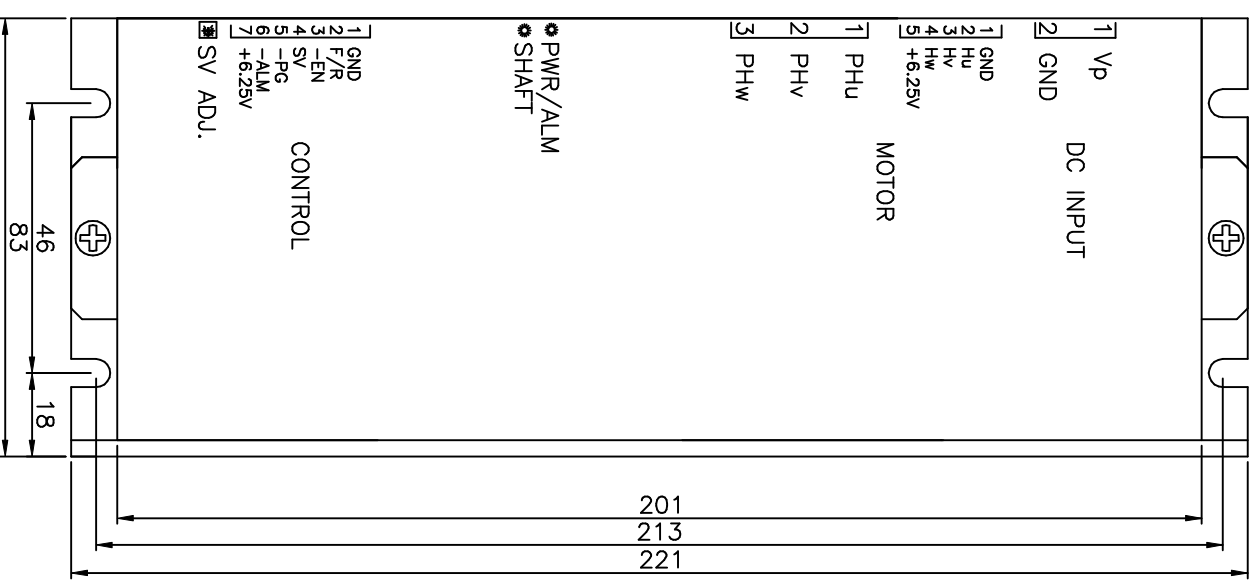


NOTE:- DO NOT CHANGE STATE OF REVERSE INPUT WHILE MOTOR IS ROTATING

FOR FIXED SPEED REQUIREMENTS, LINK PIN 5 TO PIN 8

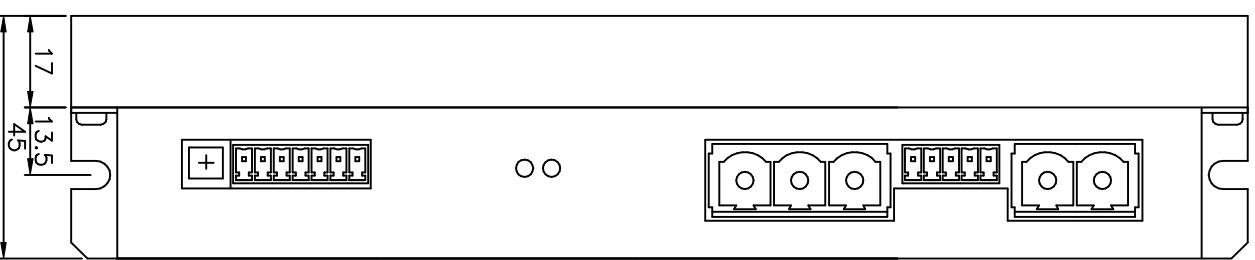

FIXING SLOT WIDTH 4.5/RADIUS 2.25
DIMENSION TOLERANCE ±1